

INSTALLATION INSTRUCTIONS

PSW06 SERIES


WIRING INSTRUCTIONS

RED	Positive VDC (Fused @ 3A)
BLACK	Negative Ground
YELLOW	Flash pattern select / Reset
WHITE	Sync signal


SIMULTANEOUS FLASH

1. Connect all Yellow wires together.
2. Leave all White wires unconnected.
3. To change the flash pattern, momentarily apply +VDC to the Yellow wire. All lights will then flash in the selected pattern simultaneously.

SIMULTANEOUS FLASH




ALTERNATE FLASH

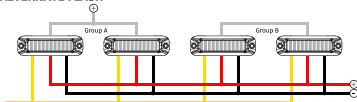

ALTERNATE FLASH

1. Connect all Yellow wires together.
2. Divide the lights into two groups:
Group A: Connect the White wires of these lights together and to the positive battery terminal (+VDC).
Group B: Connect the White wires of the remaining lights together, but do not connect them to the battery.
3. To change the flash pattern, momentarily apply +VDC to the Yellow wire. The lights in Group A and Group B will then flash alternately in the selected pattern.

PSW0608A/PSW0608W



PSW0612A / PSW0612W




FLASH PATTERNS

1	Single	6	Double (split)
2	Quadruple (split)	7	Triple
3	Quintuple	8	Single (split)
4	Triple (split)	9	Double
5	Quadruple	10	Sextuple

SPECIFICATIONS

	PSW0608A	PSW608W	PSW0612A	PSW0612W
COLOUR	Amber	White	Amber	White
SYNCHRONISATION	Simultaneous & Alternate	Simultaneous & Alternate	Simultaneous & Alternate	Simultaneous & Alternate
FLASH PATTERNS	10	10	10	10
INPUT VOLTAGE	10-30 VDC	10-30 VDC	10-30 VDC	10-30 VDC
LEDS PER HEAD	4 x 3W	4 x 4W	6 x 3W	6 x 4W
CURRENT DRAW	1A@13.8V	1A@13.8V	1.5A@13.8V	1.5A@13.8V
BASE	Aluminium	Aluminium	Aluminium	Aluminium
LENS	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
DIMENSIONS	101 x 32 x 11mm 3.98 x 1.26 x 0.43 inch	101 x 32 x 11mm 3.98 x 1.26 x 0.43 inch	120 x 32 x 11mm 4.72 x 1.26 x 0.43 inch	120 x 32 x 11mm 4.72 x 1.26 x 0.43 inch
MOUNTING CENTRES	89mm/3.5inch	89mm/3.5inch	108mm/4.25inch	108mm/4.25inch

DIMENSIONS

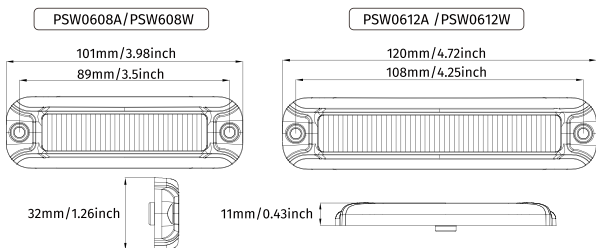

Important: Ensure this safety unit is connected to its own fused power point to maintain functionality even if other electrical devices fail.

SUPPORT

If any questions or concerns about your product, please contact us immediately. We'll resolve any issues promptly.

Email : support@primelux.com